

HOZU®



PRODUCT CATALOG

瑞安市昊洲汽配有限公司
RUIAN CITY HAOZHOU AUTO PARTS CO.,LTD

Material

HOZU昊洲汽配


No.	DIN	AISI	GB	JIS
W1	Mild steel, zinc plated.			
W2	Composite: Mild steel / stainless steel 430/1.4016/1Cr17			
W3	1.4016	430	1Cr17	SUS430
W4	1.4301	304	0Cr18Ni9	SUS304
W5	1.4401	316	0Cr17Ni11Mo2	SUS316

W1	All parts carbon steeland at least 72 hours resistance rust of processing.
W2	Manufacture decide the material and surface processing.Hozu clamp make bolt in carbon steel ,the other parts in AISI304 series stainless steel.
W3	All parts 1.4016/AISI 430/SS2320 series stainless steel ,and at lest 500 hours resistance rust of processing.
W4	All parts 1.4301/AISI 304/SS2333 series stainless steel,and at lest 500 hours resistance rust of processing.
W5	All parts 1.4436/AISI 316/SS2343 series resistance acid stainless steel,and at lest 2000 hours resistance rust of processing.

General Purpose

HOZU昊洲汽配

A type

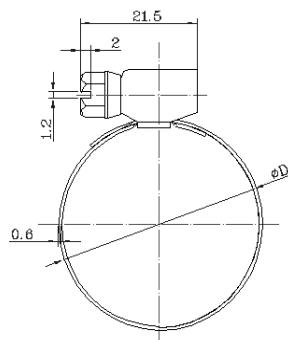

SAE Sizes	Part No.	CLAMPING RANGE				Torque N. m	pack pcs/bag	kg per 100 pcs
		inch		mm				
		Min	Max	Min	Max			
12	201 008012	5/16	15/32	8	12	2.4		
16	201 010016	13/32	5/8	10	16	2.4		
20	201 012020	1/2	25/32	12	20	3.6		
25	201 016025	21/32	31/32	16	25	3.6		
32	201 020032	25/32	1 1/4	20	32	3.6		
40	201 025040	1	1 9/16	25	40	3.6		
50	201 032050	1 1/4	1 31/32	32	50	3.6		
60	201 040060	1 19/32	2 11/32	40	60	3.6		
70	201 050070	1 31/32	2 3/4	50	70	3.6		
80	201 060080	2 3/8	3 1/8	60	80	3.6		
90	201 070090	2 3/4	3 1/2	70	90	3.6		
100	201 080100	3 1/8	3 15/16	80	100	3.6		
110	201 090110	3 9/16	4 5/16	90	110	3.6		
120	201 100120	3 15/16	4 23/32	100	120	3.6		
130	201 110130	4 5/16	5 1/8	110	130	3.6		

Want to know more specification ,please contact hozu auto parts CO.,LTD

<http://www.cnhozu.com>


E-mail: hozu@cnhozu.com

Tel:0577-65353877 Fax:0577-65396876

General Purpose

HOZU昊洲汽配

B type

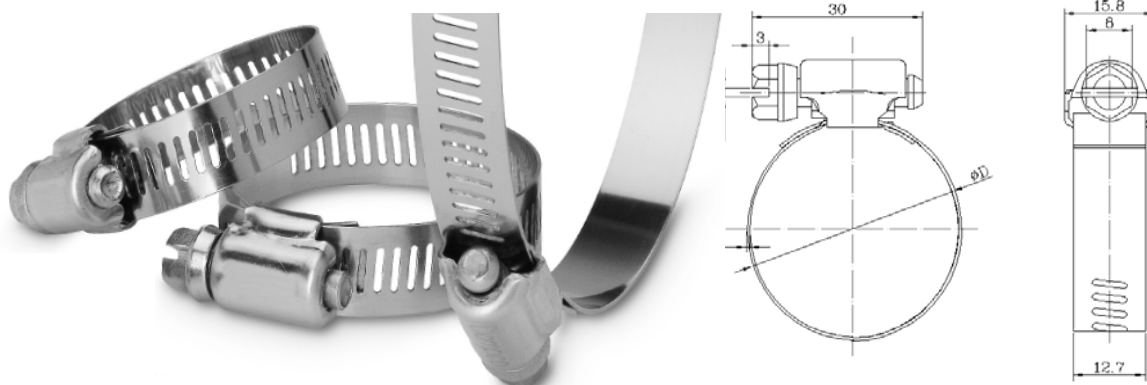


SAE Sizes	Part No.	CLAMPING RANGE				Torque N. m	pack pcs/bag	kg per 100 pcs
		inch		mm				
		Min	Max	Min	Max			
6	102 010022	3/8	7/8	10	22	6		
8	102 011025	7/16	1	11	25	6		
10	102 013027	1/2	1 1/16	13	27	6		
12	102 013032	1/2	1 1/4	13	32	6		
16	102 018038	11/16	1 1/2	18	38	6		
20	102 019044	3/4	1 3/4	19	44	6		
24	102 025051	1	2	25	51	6		
28	102 032057	1 1/4	2 1/4	32	57	6		
32	102 038063	1 1/2	2 1/2	38	63	6		
36	102 044070	1 3/4	2 3/4	44	70	6		
40	102 051076	2	3	51	76	6		
44	102 057082	2 1/4	3 1/4	57	82	6		
48	102 064089	2 1/2	3 1/2	64	89	6		
52	102 070095	2 3/4	3 3/4	70	95	6		
56	102 076101	3	4	76	101	6		
60	102 083108	3 1/4	4 1/4	83	108	6		
64	102 061114	2 1/2	4 1/2	64	114	6		
72	102 076127	3	5	76	127	6		
80	102 089140	3 1/2	5 1/2	89	140	6		
88	102 102152	4	6	102	152	6		
96	102 114165	4 1/2	6 1/2	114	165	6		
104	102 127178	5	7	127	178	6		

Want to know more specification ,please contact hozu auto parts CO,.LTD

General Purpose

HOZU昊洲汽配

C type

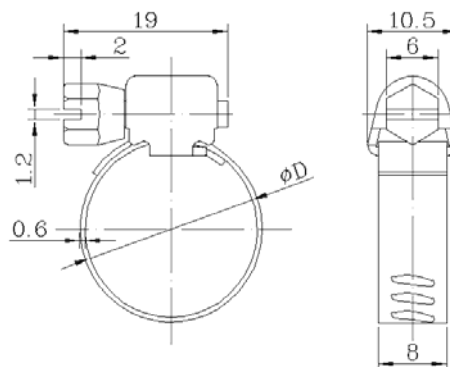


SAE Sizes	Part No.	CLAMPING RANGE				Torque N. m	pack pcs/bag	kg per 100 pcs
		inch		mm				
		Min	Max	Min	Max			
4	103 006016	1/4	5/8	6	16	2.6		
5	103 007017	1/4	11/16	7	17	2.6		
6	103 008022	5/16	7/8	8	22	2.6		
8	103 010025	3/8	1	10	25	2.6		
10	103 010027	3/8	11/16	10	27	2.6		
12	103 013032	1/2	11/4	13	32	2.6		
16	103 013038	1/2	11/2	13	38	2.6		
20	103 019044	3/4	13/4	19	44	2.6		
24	103 026051	1	2	26	51	2.6		
28	103 032057	11/4	21/4	32	57	2.6		
30	103 035060	13/8	23/8	35	60	2.6		
32	103 038063	11/2	21/2	38	63	2.6		
36	103 045070	13/4	23/4	45	70	2.6		
44	103 057082	21/4	31/4	57	82	2.6		
48	103 064089	21/2	31/2	64	89	2.6		

Want to know more specification ,please contact hozu auto parts CO.,LTD

General Purpose

HOZU昊洲汽配

Turn key clamp

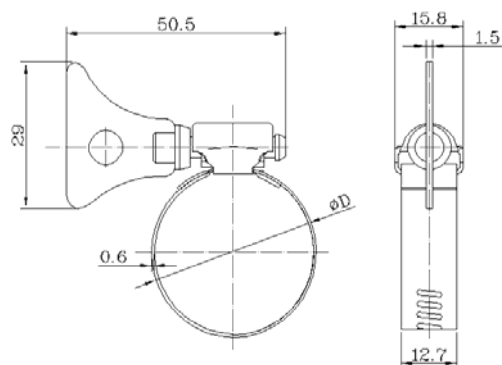


SAE Sizes	Part No.	CLAMPING RANGE				Torque N. m	pack pcs/bag	kg per 100 pcs
		inch		mm				
		Min	Max	Min	Max			
6	104 010022	3/8	7/8	10	22	6		
8	104 011025	7/16	1	11	25	6		
10	104 013027	1/2	1 1/16	13	27	6		
12	104 013032	1/2	1 1/4	13	32	6		
16	104 018038	11/16	1 1/2	18	38	6		
20	104 019044	3/4	1 3/4	19	44	6		
24	104 025051	1	2	25	51	6		
28	104 032057	1 1/4	2 1/4	32	57	6		
32	104 038063	1 1/2	2 1/2	38	63	6		
36	104 044070	1 3/4	2 3/4	44	70	6		
40	104 051076	2	3	51	76	6		
44	104 057082	2 1/4	3 1/4	57	82	6		
48	104 064089	2 1/2	3 1/2	64	89	6		
52	104 070095	2 3/4	3 3/4	70	95	6		
56	104 076101	3	4	76	101	6		
60	104 083108	3 1/4	4 1/4	83	108	6		
64	104 061114	2 1/2	4 1/2	64	114	6		
72	104 076127	3	5	76	127	6		
80	104 089140	3 1/2	5 1/2	89	140	6		
88	104 102152	4	6	102	152	6		
96	104 114165	4 1/2	6 1/2	114	165	6		
104	104 127178	5	7	127	178	6		

Want to know more specification ,please contact hozu auto parts CO.,LTD

General Purpose

HOZU昊洲汽配


Quick release clamp

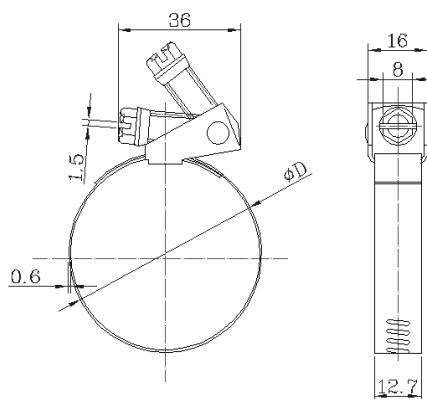

SAE Sizes	Part No.	CLAMPING RANGE				Torque N. m	pack pcs/bag	kg per 100 pcs
		inch		mm				
		Min	Max	Min	Max			
12	105 013032	1/2	1 1/4	13	32			
20	105 019044	3/4	1 3/4	19	44			
24	105 026051	1	2	26	51			
28	105 026057	1	2 1/4	26	57			
36	105 026070	1	2 3/4	26	70			
48	105 038089	1 1/2	3 1/2	38	89			
56	105 026101	1	4	26	101			
72	105 051127	2	5	51	127			
88	105 051152	2	6	51	152			
104	105 045178	1 3/4	7	45	178			
116	105 045197	1 3/4	7 3/4	45	197			
128	105 055216	2 1/4	8 1/2	55	216			
136	105 045228	1 3/4	9	45	228			
152	105 051254	2	10	51	254			
188	105 051311	2	12 1/4	51	311			

Want to know more specification ,please contact hozu auto parts CO,.LTD

Worm drive V-band clamp

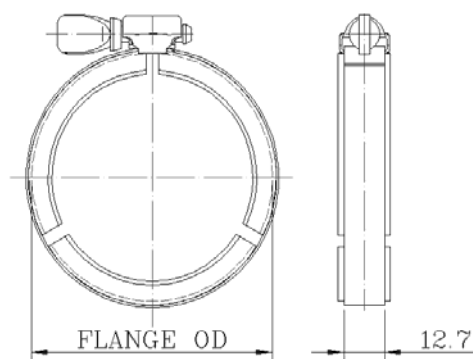


Custom requirements

we can according to custom requirement to make products. The series clamp can be widely used in various kind of industry such as dairy industry equipment、agriculture irrigation etc.

Want to know more specification ,please contact hozu auto parts CO,.LTD

Single Ear (505R)

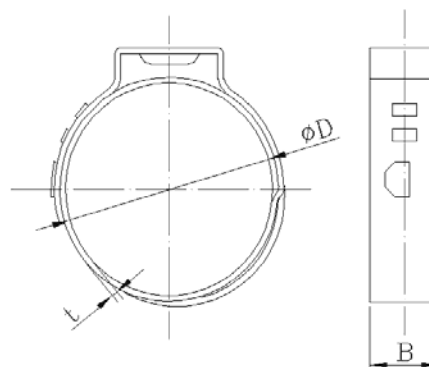


Band width 5 mm, thickness 0.5 mm (505R)


Band width 5 mm, thickness 0.5 mm (505R)

SAE Sizes	Part No.	CLAMPING RANGE				pack pcs/bag	kg per 100 pcs
		inch		mm			
		Min	Max	Min	Max		
006.5-505R	201 505R065	0.21	0.26	5.3	6.5		
007.0-505R	201 505R070	0.23	0.28	5.8	7.0		
008.0-505R	201 505R080	0.27	0.31	6.8	8.0		
008.7-505R	201 505R087	0.28	0.34	7.0	8.7		
009.0-505R	201 505R090	0.29	0.35	7.3	9.0		
009.5-505R	201 505R095	0.31	0.37	7.8	9.5		
010.0-505R	201 505R100	0.33	0.39	8.3	10.0		
010.5-505R	201 505R105	0.35	0.41	8.8	10.5		
010.9-505R	201 505R109	0.36	0.43	9.2	10.9		
011.3-505R	201 505R113	0.38	0.44	9.6	11.3		
011.8-505R	201 505R118	0.40	0.46	10.1	11.8		


Want to know more specification ,please contact hozu auto parts CO.,LTD

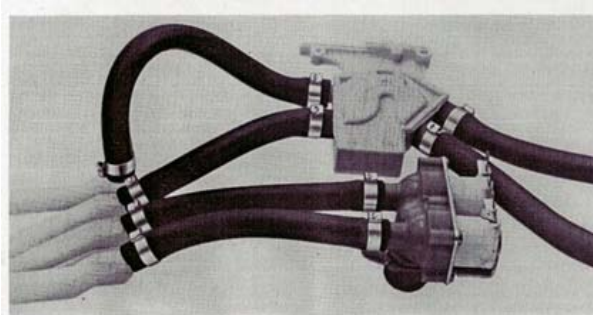

Technical Changes Possible

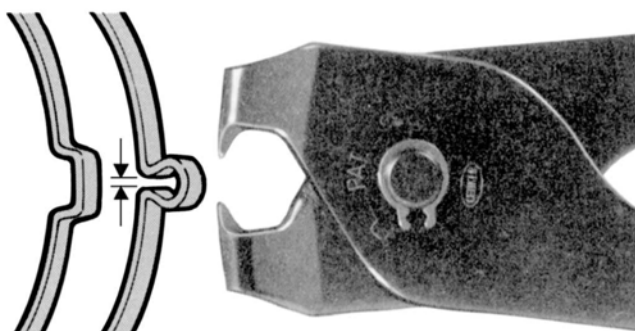

Single Ear (706R)

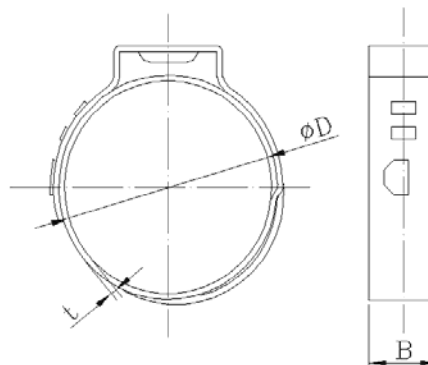


Band width 7 mm, thickness 0.6 mm (706R)

SAE Sizes	Part No.	CLAMPING RANGE				pack pcs/bag	kg per 100 pcs
		inch		mm			
		Min	Max	Min	Max		
011.9-706R	201 706R119	0.37	0.47	9.4	11.9		
012.3-706R	201 706R123	0.39	0.48	9.8	12.3		
012.8-706R	201 706R128	0.41	0.50	10.3	12.8		
013.3-706R	201 706R133	0.43	0.52	10.8	13.3		
013.8-706R	201 706R138	0.44	0.54	11.3	13.8		
014.0-706R	201 706R140	0.45	0.55	11.5	14.0		
014.2-706R	201 706R142	0.46	0.56	11.7	14.2		
014.5-706R	201 706R145	0.47	0.57	12.0	14.5		
014.8-706R	201 706R148	0.48	0.58	12.3	14.8		
015.3-706R	201 706R153	0.50	0.60	12.8	15.3		
015.7-706R	201 706R157	0.52	0.62	13.2	15.7		
016.0-706R	201 706R160	0.53	0.63	13.5	16.0		
016.2-706R	201 706R162	0.54	0.64	13.7	16.2		
016.6-706R	201 706R166	0.56	0.65	14.1	16.6		
016.8-706R	201 706R168	0.56	0.66	14.3	16.8		
017.0-706R	201 706R170	0.57	0.67	14.5	17.0		
017.5-706R	201 706R175	0.59	0.69	15.0	17.5		
017.8-706R	201 706R178	0.57	0.70	14.6	17.8		
018.0-706R	201 706R180	0.58	0.71	14.8	18.0		
018.5-706R	201 706R185	0.60	0.73	15.3	18.5		
019.2-706R	201 706R192	0.63	0.76	16.0	19.2		
019.8-706R	201 706R198	0.65	0.78	16.6	19.8		
021.0-706R	201 706R210	0.70	0.83	17.8	21.0		
022.6-706R	201 706R226	0.76	0.89	19.4	22.6		
023.5-706R	201 706R235	0.80	0.93	20.3	23.5		
024.1-706R	201 706R241	0.82	0.95	20.9	24.1		
025.6-706R	201 706R256	0.88	1.01	22.4	25.6		
027.1-706R	201 706R271	0.94	1.07	23.9	27.1		
028.6-706R	201 706R286	1.00	1.13	25.4	28.6		
030.1-706R	201 706R301	1.06	1.19	26.9	30.1		

Want to know more specification ,please contact hozu auto parts CO,.LTD

Single Ear (906R)

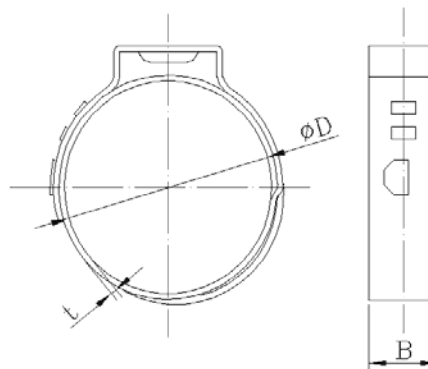


Band width 9 mm, thickness 0.6 mm (906R)

Band width 5 mm, thickness 0.8 mm (500R)							
SAE Sizes	Part No.	CLAMPING RANGE				pack pcs/bag	kg per 100 pcs
		inch		mm			
		Min	Max	Min	Max		
021.0-906R	201 906R210	0.70	0.83	17.8	21.0		
022.6-906R	201 906R226	0.76	0.89	19.4	22.6		
023.5-906R	201 906R235	0.80	0.93	20.3	23.5		
024.1-906R	201 906R241	0.82	0.95	20.9	24.1		
025.6-906R	201 906R256	0.88	1.01	22.4	25.6		
027.1-906R	201 906R271	0.94	1.07	23.9	27.1		
028.6-906R	201 906R286	1.00	1.13	25.4	28.6		
030.1-906R	201 906R301	1.06	1.19	26.9	30.1		
030.8-906R	201 906R308	1.09	1.21	27.6	30.8		
031.6-906R	201 906R316	1.12	1.24	28.4	31.6		
033.1-906R	201 906R331	1.18	1.30	29.9	33.1		
034.6-906R	201 906R346	1.24	1.36	31.4	34.6		
036.1-906R	201 906R361	1.30	1.42	32.9	36.1		
037.6-906R	201 906R376	1.35	1.48	34.4	37.6		
038.1-906R	201 906R381	1.37	1.50	34.9	38.1		
039.6-906R	201 906R396	1.43	1.56	36.4	39.6		
041.0-906R	201 906R410	1.49	1.61	37.8	41.0		
042.5-906R	201 906R425	1.55	1.67	39.3	42.5		
044.0-906R	201 906R440	1.61	1.73	40.8	44.0		
045.5-906R	201 906R455	1.67	1.79	42.3	45.5		
047.0-906R	201 906R470	1.72	1.85	43.8	47.0		
048.5-906R	201 906R485	1.78	1.91	45.3	48.5		
050.0-906R	201 906R500	1.84	1.97	46.8	50.0		
051.5-906R	201 906R515	1.90	2.03	48.3	51.5		
053.0-906R	201 906R530	1.96	2.09	49.8	53.0		
054.5-906R	201 906R545	2.02	2.15	51.3	54.5		
056.0-906R	201 906R560	2.08	2.20	52.8	56.0		
057.5-906R	201 906R575	2.14	2.26	54.3	57.5		
059.0-906R	201 906R590	2.20	2.32	55.8	59.0		
060.5-906R	201 906R605	2.26	2.38	57.3	60.5		

Want to know more specification ,please contact hozu auto parts CO.,LTD

2-Ear Clamps

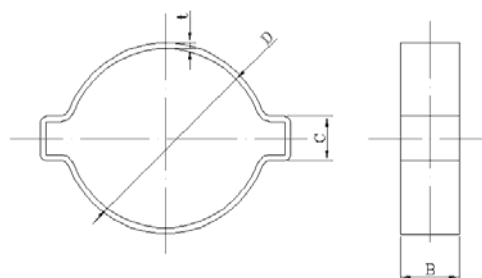


SAE Sizes	Part No.	CLAMPING RANGE				B (mm)	t (mm)	C (mm)	pack pcs/bag	kg per 100 pcs
		inch		mm						
		Min	Max	Min	Max					
70	202 070	0.20	0.28	5.0	7.0	6.0	0.5	3.0		
90	202 090	0.28	0.35	7.0	9.0	7.0	0.8	3.2		
110	202 110	0.31	0.43	8.0	11.0	7.0	0.8	4.5		
119	202 119	0.35	0.43	9.0	11.0	7.0	0.8	3.5		
130	202 130	0.43	0.51	11.0	13.0	7.0	0.8	3.5		
150	202 150	0.51	0.59	13.0	15.0	8.0	0.8	4.0		
170	202 170	0.54	0.67	13.8	17.0	8.0	0.8	5.0		
180	202 180	0.59	0.71	15.0	18.0	8.5	0.8	5.0		
200	202 200	0.67	0.79	17.0	20.0	9.0	1.0	6.0		
220	202 220	0.75	0.87	19.0	22.0	9.0	1.0	6.5		
230	202 230	0.79	0.91	20.0	23.0	10.0	1.0	6.5		
250	202 250	0.87	0.98	22.0	25.0	10.0	1.0	6.5		
270	202 270	0.91	1.06	23.0	27.0	10.0	1.0	7.0		
280	202 280	0.98	1.10	25.0	28.0	10.0	1.0	6.5		
310	202 310	1.06	1.22	27.0	31.0	10.0	1.0	7.5		
318	202 318	1.10	1.22	28.0	31.0	10.0	1.0	6.5		
340	202 340	1.22	1.34	31.0	34.0	10.0	1.0	7.5		



Want to know more specification ,please contact hozu auto parts CO,.LTD

Earless clamp

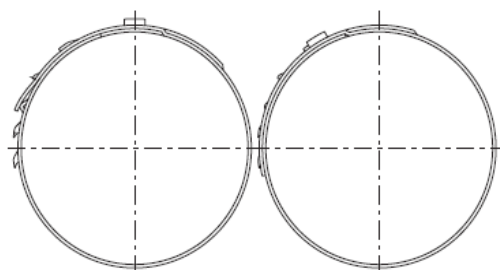

Band width 7 mm, thickness 0.6 mm (706R)

Band width 7 mm, thickness 0.6 mm (100%)

SAE Sizes	Part No.	CLAMPING RANGE				pack pcs/bag	kg per 100 pcs
		inch		mm			
		Min	Max	Min	Max		
019.5-706R	203 706R0195	0.94	0.77	23.9	19.5		
020.0-706R	203 706R0200	0.96	0.79	24.4	20.0		
020.5-706R	203 706R0205	0.98	0.81	24.9	20.5		
021.0-706R	203 706R0210	1.00	0.83	25.4	21.0		
109.0-706R	203 706R1090	4.46	4.29	113.4	109.0		
109.5-706R	203 706R1095	4.48	4.31	113.9	109.5		
110.0-706R	203 706R1100	4.50	4.33	114.4	110.0		




Want to know more specification ,please contact hozu auto parts CO.,LTD

<http://www.cnhozu.com>

E-mail:hozu@cnhozu.com

Tel:0577-65353877 Fax:0577-65396876


Rotor clamp

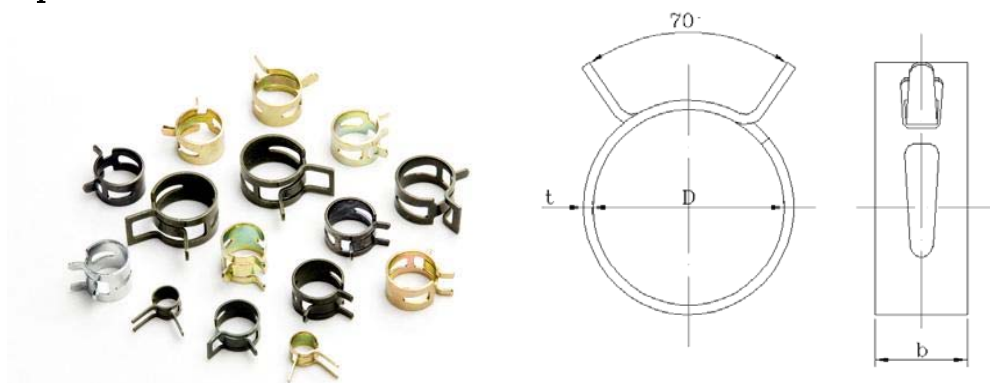

SAE Sizes	Part No.	b (mm)	t (mm)	CLAMPING RANGE				pack pcs/bag	kg per 100 pcs
				inch		mm			
				Min	Max	Min	Max		
7.0	204 000070	6.0	0.6	0.30	0.33	7.6	8.3		
8.0	204 000080			0.34	0.37	8.6	9.5		
8.5	204 000085			0.36	0.40	9.2	10.2		
9.0	204 000090			0.38	0.42	9.7	10.7		
9.5	204 000095			0.41	0.44	10.3	11.3		
10.0	204 000100	8.0	0.8	0.43	0.47	10.8	11.9		
10.5	204 000105			0.45	0.49	11.4	12.5		
11.0	204 000110			0.47	0.52	11.9	13.1		
11.5	204 000115			0.49	0.54	12.4	13.7		
12.0	204 000120			0.51	0.56	13.0	14.3		
12.5	204 000125			0.53	0.59	13.5	14.9		
13.0	204 000130			0.55	0.61	14.0	15.5		
13.5	204 000135			0.57	0.63	14.6	16.1		
14.0	204 000140			0.59	0.66	15.1	16.7		
14.5	204 000145			10.0	1.0	0.62	0.68	15.7	17.3
15.0	204 000150	0.64	0.70			16.2	17.9		
15.5	204 000155	0.66	0.72			16.7	18.4		
16.0	204 000160	0.68	0.75			17.3	19.1		
16.5	204 000165	0.70	0.78			17.9	19.7		
17.0	204 000170	12.0	1.0	0.72	0.80	18.4	20.2		
17.5	204 000175			0.74	0.82	18.9	20.9		
18.0	204 000180			0.76	0.84	19.4	21.4		
18.5	204 000185			0.79	0.87	20.0	22.1		
19.0	204 000190			0.81	0.89	20.5	22.6		
19.5	204 000195			0.83	0.92	21.1	23.3		
20.0	204 000200			0.85	0.94	21.6	23.8		
20.5	204 000205			0.87	0.96	22.2	24.4		
21.0	204 000210			0.89	0.98	22.7	25.0		
23.0	204 000230			1.2	1.2	0.98	1.08	24.8	27.4
24.0	204 000240	1.02	1.12			25.9	28.5		
25.0	204 000250	1.06	1.17			27.0	29.8		

Want to know more specification ,please contact hozu auto parts CO.,LTD

Stainless steel Cable ties

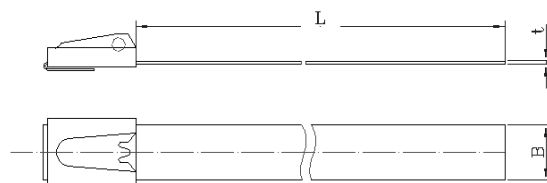

SAE Sizes	Part No.	B (mm)	t (mm)	L (mm)	pack pcs/bag	kg per 100 pcs
150-525	205 150-525	5.0	0.25	150		
200-525	205 200-525	5.0	0.25	200		
250-525	205 250-525	5.0	0.25	250		
300-525	205 300-525	5.0	0.25	300		
350-525	205 350-525	5.0	0.25	350		
400-525	205 400-525	5.0	0.25	400		
450-525	205 450-525	5.0	0.25	450		
500-525	205 500-525	5.0	0.25	500		
200-825	205 200-825	8.0	0.25	200		
250-825	205 250-825	8.0	0.25	250		
300-825	205 300-825	8.0	0.25	300		
350-825	205 350-825	8.0	0.25	350		
400-825	205 400-825	8.0	0.25	400		
450-825	205 450-825	8.0	0.25	450		
500-825	205 500-825	8.0	0.25	500		


We can supply you with the below products



Want to know more specification ,please contact hozu auto parts CO.,LTD

<http://www.cnhozu.com> E-mail: hozu@cnhozu.com Tel:0577-65353877 Fax:0577-65396876

T-Bolt Standard

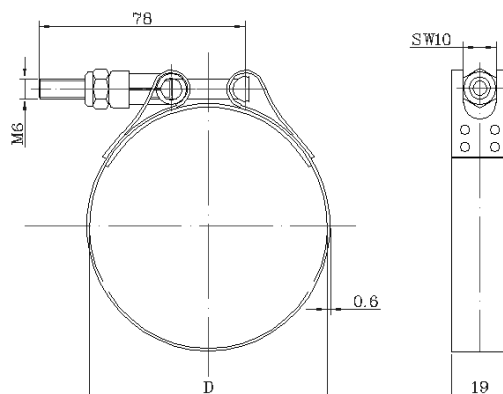


SAE Sizes	Part No.	CLAMPING RANGE				Torque N. m	pack pcs/bag	kg per 100 pcs
		inch		mm				
		Min	Max	Min	Max			
–	301 0386	1.38	1.52	35.1	38.6	8.5		
–	301 0417	1.50	1.64	38.1	41.7	8.5		
–	301 0460	1.63	1.81	41.4	46.0	8.5		
28	301 0508	1.75	2.00	44.5	50.8	8.5		
32	301 0556	1.88	2.19	47.8	55.6	8.5		
36	301 0587	2.00	2.31	50.8	58.7	8.5		
40	301 0620	2.13	2.44	54.1	62.0	8.5		
44	301 0650	2.25	2.56	57.2	65.0	8.5		
48	301 0683	2.38	2.69	60.5	68.3	8.5		
52	301 0714	2.50	2.81	63.5	71.4	8.5		
56	301 0747	2.63	2.94	66.8	74.7	8.5		
60	301 0777	2.75	3.06	69.9	77.7	8.5		
64	301 0810	2.88	3.19	73.2	81.0	8.5		
68	301 0841	3.00	3.31	76.2	84.1	8.5		
72	301 0874	3.13	3.44	79.5	87.4	8.5		
76	301 0904	3.25	3.56	82.6	90.4	8.5		
80	301 0937	3.38	3.69	85.9	93.7	8.5		
84	301 0968	3.50	3.81	88.9	96.8	8.5		
88	301 1001	3.63	3.94	92.2	100.1	8.5		
92	301 1031	3.75	4.06	95.3	103.1	8.5		
100	301 1095	4.00	4.31	101.6	109.5	8.5		
108	301 1158	4.25	4.56	108.0	115.8	8.5		
116	301 1222	4.50	4.81	114.3	122.2	8.5		
124	301 1285	4.75	5.06	120.7	128.5	8.5		
132	301 1349	5.00	5.31	127.0	134.9	8.5		
140	301 1412	5.25	5.56	133.4	141.2	8.5		
148	301 1476	5.50	5.81	139.7	147.6	8.5		
156	301 1539	5.75	6.06	146.1	153.9	8.5		
164	301 1603	6.00	6.31	152.4	160.3	8.5		
172	301 1666	6.25	6.56	158.8	166.6	8.5		
180	301 1730	6.50	6.81	165.1	173.0	8.5		

Want to know more specification ,please contact hozu auto parts CO.,LTD

Heavy Duty

HOZU昊洲汽配

T-Bolt Channel Bridge

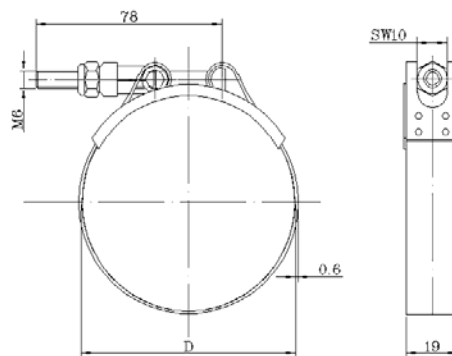

SAE Sizes	Part No.	CLAMPING RANGE				Torque N. m	pack pcs/bag	kg per 100 pcs
		inch		mm				
		Min	Max	Min	Max			
–	302 0386	1.38	1.52	35.1	38.6	8.5		
–	302 0417	1.50	1.64	38.1	41.7	8.5		
–	302 0460	1.63	1.81	41.4	46.0	8.5		
28	302 0508	1.75	2.00	44.5	50.8	8.5		
32	302 0556	1.88	2.19	47.8	55.6	8.5		
36	302 0587	2.00	2.31	50.8	58.7	8.5		
40	302 0620	2.13	2.44	54.1	62.0	8.5		
44	302 0650	2.25	2.56	57.2	65.0	8.5		
48	302 0683	2.38	2.69	60.5	68.3	8.5		
52	302 0714	2.50	2.81	63.5	71.4	8.5		
56	302 0747	2.63	2.94	66.8	74.7	8.5		
60	302 0777	2.75	3.06	69.9	77.7	8.5		
64	302 0810	2.88	3.19	73.2	81.0	8.5		
68	302 0841	3.00	3.31	76.2	84.1	8.5		
72	302 0874	3.13	3.44	79.5	87.4	8.5		
76	302 0904	3.25	3.56	82.6	90.4	8.5		
80	302 0937	3.38	3.69	85.9	93.7	8.5		
84	302 0968	3.50	3.81	88.9	96.8	8.5		
88	302 1001	3.63	3.94	92.2	100.1	8.5		
92	302 1031	3.75	4.06	95.3	103.1	8.5		
100	302 1095	4.00	4.31	101.6	109.5	8.5		
108	302 1158	4.25	4.56	108.0	115.8	8.5		
116	302 1222	4.50	4.81	114.3	122.2	8.5		
124	302 1285	4.75	5.06	120.7	128.5	8.5		
132	302 1349	5.00	5.31	127.0	134.9	8.5		
140	302 1412	5.25	5.56	133.4	141.2	8.5		
148	302 1476	5.50	5.81	139.7	147.6	8.5		
156	302 1539	5.75	6.06	146.1	153.9	8.5		
164	302 1603	6.00	6.31	152.4	160.3	8.5		
172	302 1666	6.25	6.56	158.8	166.6	8.5		
180	302 1730	6.50	6.81	165.1	173.0	8.5		


Want to know more specification ,please contact hozu auto parts CO.,LTD

<http://www.cnhozu.com>

E-mail:hozu@cnhozu.com

Tel:0577-65353877 Fax:0577-65396876


T-Bolt Spring Loaded

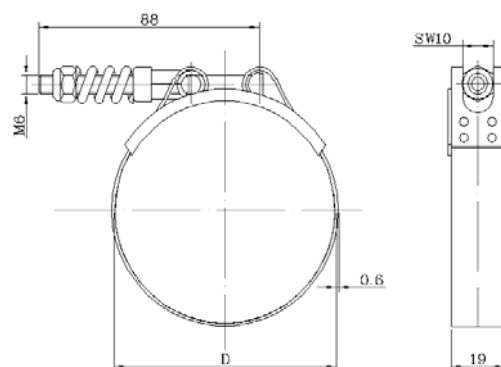


SAE Sizes	Part No.	CLAMPING RANGE				Torque N. m	pack pcs/bag	kg per 100 pcs
		inch		mm				
		Min	Max	Min	Max			
70	303 0857	3.06	3.37	77.8	85.7			
86	303 0984	3.56	3.87	90.5	98.4			
102	303 1111	4.06	4.37	103.2	111.1			
118	303 1238	4.56	4.87	115.9	123.8			

Want to know more specification ,please contact hozu auto parts CO,.LTD


V-Band Clamp/Couplings

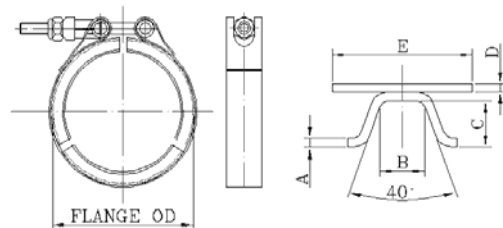

V-Bands seal connections for flanged joints. Typical applications include filter housings, turbocharger systems, exhaust systems and industrial applications where a flanged connection is required. V-inserts can be manufactured to OE specifications and are made to order. Send full specifications for quotes. Contact Hozu with your special requirements or use the Request a Quote feature to upload your drawing and specifications.

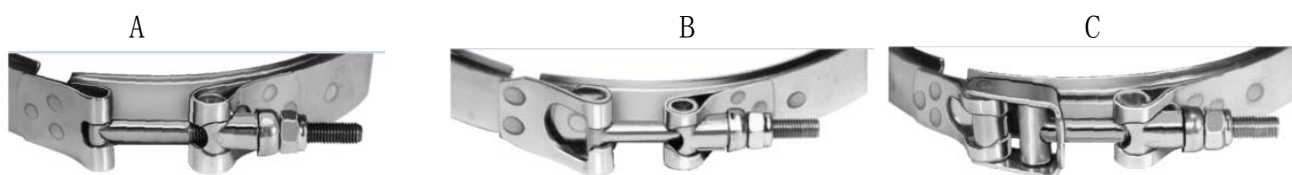


Barrel Hardware

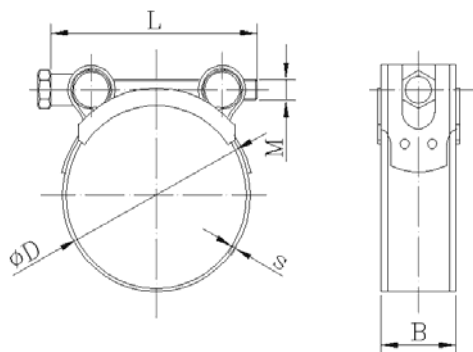

SAE Sizes	Part No.	CLAMPING RANGE				B (mm)	S				Bolt M*L	Torque (N. m)	pack pcs/bag	kg per 100 pcs
		inch		mm			W1 (mm)	W2	W3	W4				
		Min	Max	Min	Max									
19	305 019	0.67	0.75	17	19	18	0.6	0.4		M5*40	5			
22	305 022	0.79	0.87	20	22	18	0.6	0.4		M5*40	5			
25	305 025	0.91	0.98	23	25	18	0.6	0.6		M5*40	5			
28	305 028	1.02	1.10	26	28	18	0.6	0.6		M5*40	5			
31	305 031	1.14	1.22	29	31	20	0.8	0.6		M6*50	15			
35	305 035	1.26	1.38	32	35	20	0.8	0.6		M6*50	15			
39	305 039	1.42	1.54	36	39	20	0.8	0.6		M6*50	15			
43	305 043	1.57	1.69	40	43	20	0.8	0.6		M6*50	15			
47	305 047	1.73	1.85	44	47	22	1.2	0.8		M6*60	15			
51	305 051	1.89	2.01	48	51	22	1.2	0.8		M6*60	15			
55	305 055	2.05	2.17	52	55	22	1.2	0.8		M6*60	15			
59	305 059	2.20	2.32	56	59	22	1.2	0.8		M6*60	15			
63	305 063	2.36	2.48	60	63	22	1.2	0.8		M6*60	25			
67	305 067	2.52	2.64	64	67	22	1.2	0.8		M8*70	25			
73	305 073	2.68	2.87	68	73	24	1.5	0.8		M8*70	25			
79	305 079	2.91	3.11	74	79	24	1.5	0.8		M8*70	25			
85	305 085	3.15	3.35	80	85	24	1.5	0.8		M8*75	25			
91	305 091	3.39	3.58	86	91	24	1.5	0.8		M8*75	25			
97	305 097	3.62	3.82	92	97	24	1.5	0.8		M8*75	25			
103	305 103	3.86	4.06	98	103	24	1.5	0.8		M8*80	25			
112	305 112	4.09	4.41	104	112	24	1.5	0.8		M8*80	25			
121	305 121	4.45	4.76	113	121	24	1.5	0.8		M8*80	25			
130	305 130	4.80	5.12	122	130	24	1.5	0.8		M8*80	25			
139	305 139	5.16	5.47	131	139	26	1.7	1.0		M10*105	40			
148	305 148	5.51	5.83	140	148	26	1.7	1.0		M10*105	40			
161	305 161	5.87	6.34	149	161	26	1.7	1.0		M10*105	40			
174	305 174	6.38	6.85	162	174	26	1.7	1.0		M10*105	40			
184	305 184	6.89	7.24	175	184	26	1.7	1.0		M10*120	40			
200	305 200	7.40	7.87	188	200	26	1.7	1.0		M10*120	40			
213	305 213	7.91	8.39	201	213	26	1.7	1.0		M10*120	40			
226	305 226	8.43	8.90	214	226	26	1.7	1.0		M10*120	40			
239	305 239	8.94	9.41	227	239	26	1.7	1.0		M10*120	40			
252	305 252	9.45	9.92	240	252	26	1.7	1.0		M10*120	40			


Want to know more specification ,please contact hozu auto parts CO.,LTD

Double wire clamp

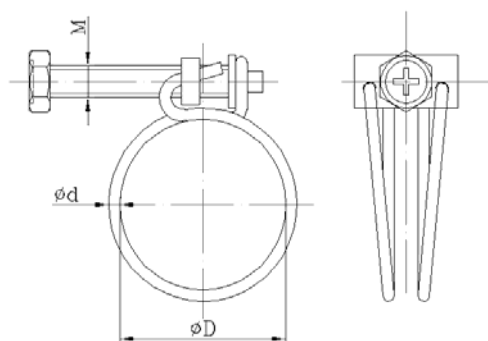


SAE Sizes	Part No.	d (mm)	Bolt (mm)	CLAMPING RANGE				Torque (N. m)	pack pcs/bag	kg per 100 pcs
				inch		mm				
				Min	Max	Min	Max			
14	306 011014	1.5	M5*30	0.43	0.55	11	14	5		
16	306 013016	1.5	M5*30	0.51	0.63	13	16	5		
18	306 015018	1.5	M5*30	0.59	0.71	15	18	5		
20	306 017020	1.8	M5*30	0.67	0.79	17	20	5		
22	306 011922	1.8	M5*30	0.75	0.87	19	22	5		
24	306 020024	1.8	M5*30	0.79	0.94	20	24	5		
26	306 022026	1.8	M5*30	0.87	1.02	22	26	5		
28	306 024028	1.8	M5*30	0.94	1.10	24	28	5		
30	306 026030	2.2	M6*40	1.02	1.18	26	30	15		
32	306 028032	2.2	M6*40	1.10	1.26	28	32	15		
35	306 031035	2.2	M6*40	1.22	1.38	31	35	15		
38	306 034038	2.2	M6*40	1.34	1.50	34	38	15		
40	306 035040	2.2	M6*40	1.38	1.57	35	40	15		
42	306 037042	2.2	M6*40	1.46	1.65	37	42	15		
45	306 040045	2.2	M6*40	1.57	1.77	40	45	15		
48	306 043048	2.2	M6*50	1.69	1.89	43	48	15		
50	306 045050	2.2	M6*50	1.77	1.97	45	50	15		
52	306 047052	2.2	M6*50	1.85	2.05	47	52	15		
55	306 050055	2.2	M6*50	1.97	2.17	50	55	15		
58	306 053058	2.2	M6*50	2.09	2.28	53	58	15		
60	306 055060	2.2	M6*60	2.17	2.36	55	60	15		
62	306 054062	2.2	M6*60	2.13	2.44	54	62	15		
65	306 060065	2.2	M6*60	2.36	2.56	60	65	15		
68	306 063068	2.2	M6*60	2.48	2.68	63	68	15		
70	306 065070	2.2	M6*70	2.56	2.76	65	70	15		
75	306 070075	2.2	M6*70	2.76	2.95	70	75	15		
80	306 075080	2.2	M6*70	2.95	3.15	75	80	15		
85	306 080085	2.2	M6*70	3.15	3.35	80	85	15		
90	306 084090	2.2	M6*70	3.31	3.54	84	90	15		
95	306 089095	2.2	M6*70	3.50	3.74	89	95	15		
100	306 094100	2.2	M6*80	3.70	3.94	94	100	15		
105	306 098105	2.2	M6*80	3.86	4.13	98	105	15		
110	306 103110	2.2	M6*80	4.06	4.33	103	110	15		
115	306 108115	2.2	M6*80	4.25	4.53	108	115	15		

Mini type

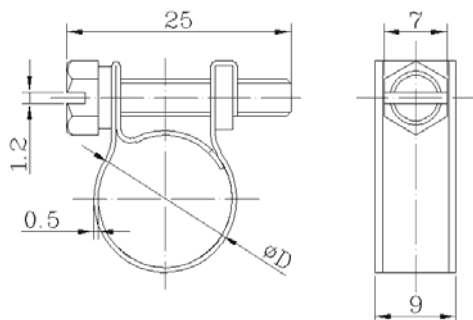


SAE Sizes	Part No.	CLAMPING RANGE				pack pcs/bag	kg per 100 pcs
		inch		mm			
		Min	Max	Min	Max		
4	202 011013	7/16	1/2	11.0	13.0		
6	202 013015	1/2	9/16	13.0	15.0		
8	202 014016	9/16	5/8	14.0	16.0		
Want to know more specification ,please contact hozu auto parts CO,.LTD							

CV clamp

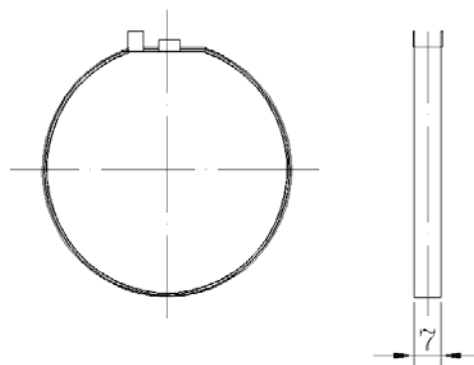

SAE Sizes	Part No.	L (mm)	B (mm)	S (mm)	pack pcs/bag	kg per 100 pcs
270	401 1270	270	7	0.3		
550	401 1550	550	7	0.3		
350	401 2350	350	7	0.3		
750	401 2750	750	7	0.3		
Want to know more specification ,please contact hozu auto parts CO,.LTD						

Air conditioning

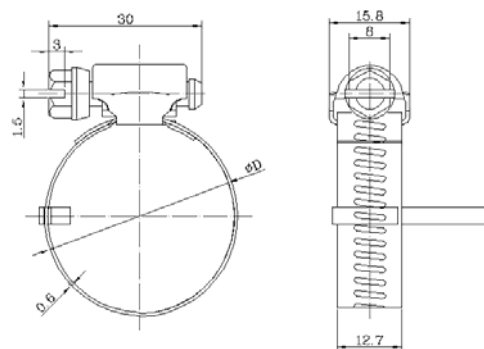

SAE Sizes	Part No.	CLAMPING RANGE				Torque (N. m)	pack pcs/bag	kg per 100 pcs
		inch		mm				
		Min	Max	Min	Max			
8	402 006016	1/4	5/8	6	16	6		
12	402 007017	1/4	11/16	7	17	6		



HOZU®

瑞安市昊洲汽配有限公司

RUIAN CITY HAOZHOU AUTO PARTS CO.,LTD

Address: Chenzhai Industrial Zone Tangxia
Street, Rui'an City, China

Tel: 86-0577-65353877

Fax: 86-0577-65396876

<http://www.cnhozu.com>

E-mail: hozu@cnhozu.com